

# ORCA

## ROLL-IN DOOR WASHER



### **A Heavy-Duty Machine Built With Commercial Customers In Mind**

Eliminate the need to manually clean parts with an old scrub tub, pressure washer or potentially harmful solvents. The Orca roll-in door parts washing system is automatic and in many cases, can pay for itself in less than one year through avoided labor costs. Available in three turntable sizes of 25, 31 and 36 inches, the Orca provides powerful cleaning in a compact space. Some of its standard features include:

#### **Sprocket-Driven Turntable**

Unlike competitors, the Orca uses a sprocket driven turntable that eliminates chains, belts and tire drives, which can stretch or slip resulting in poor cleaning performance, increased maintenance and component replacement.

#### **Oil Skimmer**

The Orca comes equipped standard with a disc style oil skimmer to remove oily residues and help extend the life of your cleaning solution.


#### **Swing-Down Spray Bar**

The swing-down spray bar reduces the distance from the part to the nozzle for better impingement on smaller parts, providing faster, more efficient cleaning.

#### **Vertical, No-Seal Pump**

The vertical, no-seal pump ensures that you'll never have to worry about pump leaks or changing seals.



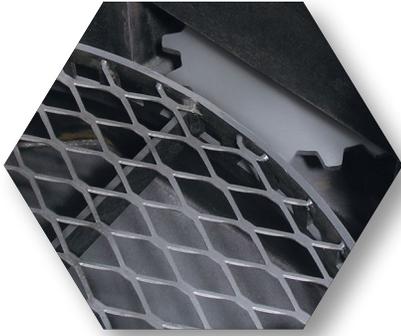

Sprocket Driven Turntable



Oil Skimmer



Vertical, No-Seal Pump



Swing-Down Spray Bar

## STANDARD FEATURES:

- » Precision V-Jet Brass Nozzles
- » Mechanical Door Seal
- » Gear-Driven Turntable
- » Forklift Access Pockets
- » Vertical, No-Seal Pump
- » 8" Wheel Oil Skimmer
- » 60-Minute Wash Timer
- » Swing-Down Spray Bar
- » Chip Basket
- » Low Water Shut-Off System
- » Overfill Drain

- » Seven-Day Programmable Timer for Heat and Skimmer

- » Auto Water Fill

## OPTIONS:

- » Parts Baskets
- » Parts Tree
- » Hydro Spray Detail Wand - Utilizes Customer Supplied Shop Air to Propel Heated Solution Through a Hand Held Wand
- » Steam Exhaust Fan
- » Casters
- » Bag Filter System (assembly required)

## SYSTEM SPECS:

	ORCA-2532	ORCA-3142	ORCA-3648
<b>TURNTABLE DIAMETER (in)</b>	25	31	36
<b>INSIDE WORKING HEIGHT (in)</b>	32	42	48
<b>WEIGHT CAPACITY (lbs)</b>	1,000	1,000	1,500
<b>LOAD HEIGHT (in)</b>	29	29	30
<b>SOLUTION (gallons)</b>	60	80	110
<b>PUMP (hp)</b>	3	3	5
<b>PUMP OUTPUT (psi/gpm)</b>	45/50	45/50	58/85
<b>HEAT (kw)</b>	6	12	12
<b>LOAD DESIGN</b>	roll-in door	roll-in door	roll-in door
<b>OVERALL DIMS (WxDxH) (in)</b>	36x51x68	42x56x78	47x65x85
<b>WEIGHT (TANK EMPTY) (lbs)</b>	800	1,000	1,200
<b>AMPS 230V/1PH</b>	44	44	89.8
<b>AMPS 208V/1PH</b>	50	50	93.4
<b>AMPS 208V/3PH</b>	29.25	45.9	54
<b>AMPS 230V/3PH</b>	27.7	42.7	48.3
<b>AMPS 460V/3PH</b>	15.4	22.9	24.2
<b>AMPS 575V/3PH</b>	10.4	16.4	19.6
<b>LISTING</b>			

